

How to flash the HDMI Firmware:

Step1: press the home button on the RC, select android settings -> Security -> Enable Unknown sources.

Step2: download the IspUpdateDemo.apk :

<https://www.dropbox.com/s/3yqvvyav0ooer7/IspUpdateDemo.apk?dl=0>


Step3 install the apk

copy the IspUpdateDemo.apk to an USB stick, insert the USB stick in the monitor.


Follow this instructions (only install the app):


<https://www.dropbox.com/s/kjb91wljauuujz7/How%20to%20install%20an%20app%20on%20the%20xxBDL3452T.pdf?dl=0>

Step3: Open the update APK and select the FW

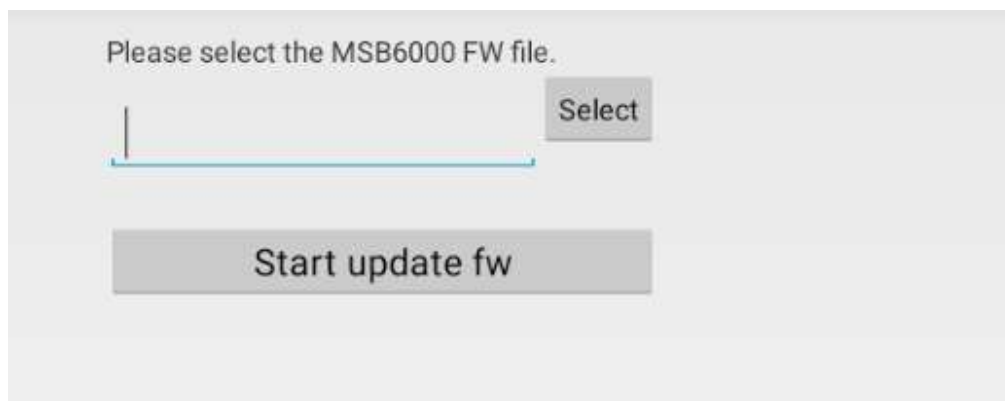


Step4: Open the MSB6K firmware from disk.

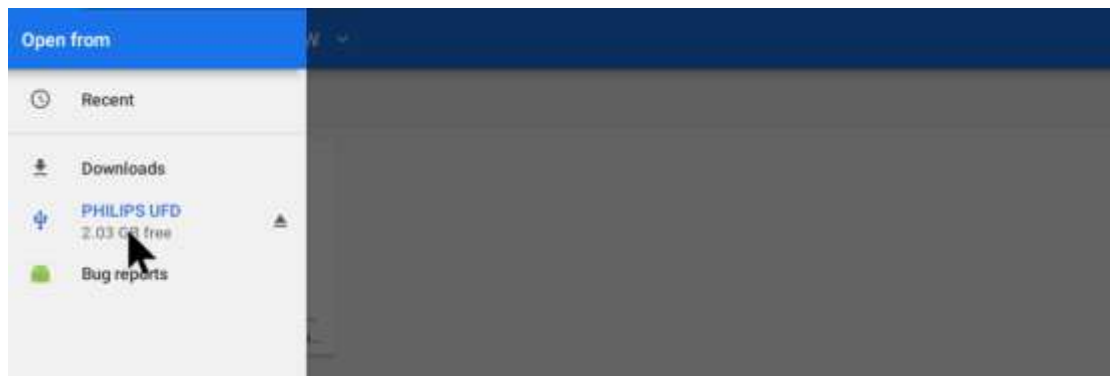

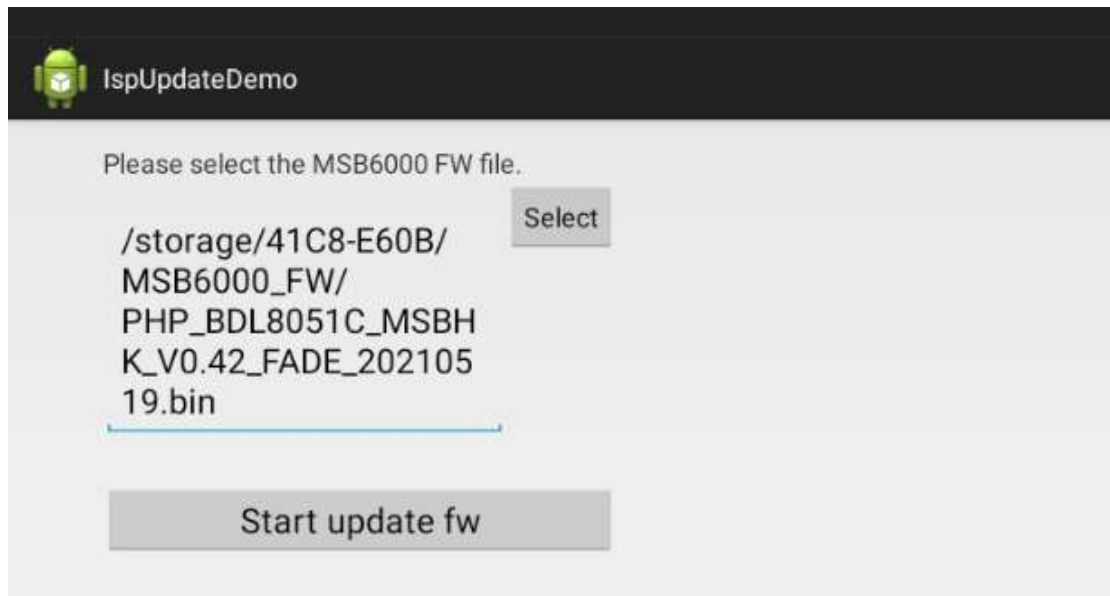

Step5: Press “Start update fw” button. The system will reboot automatically after the firmware update.

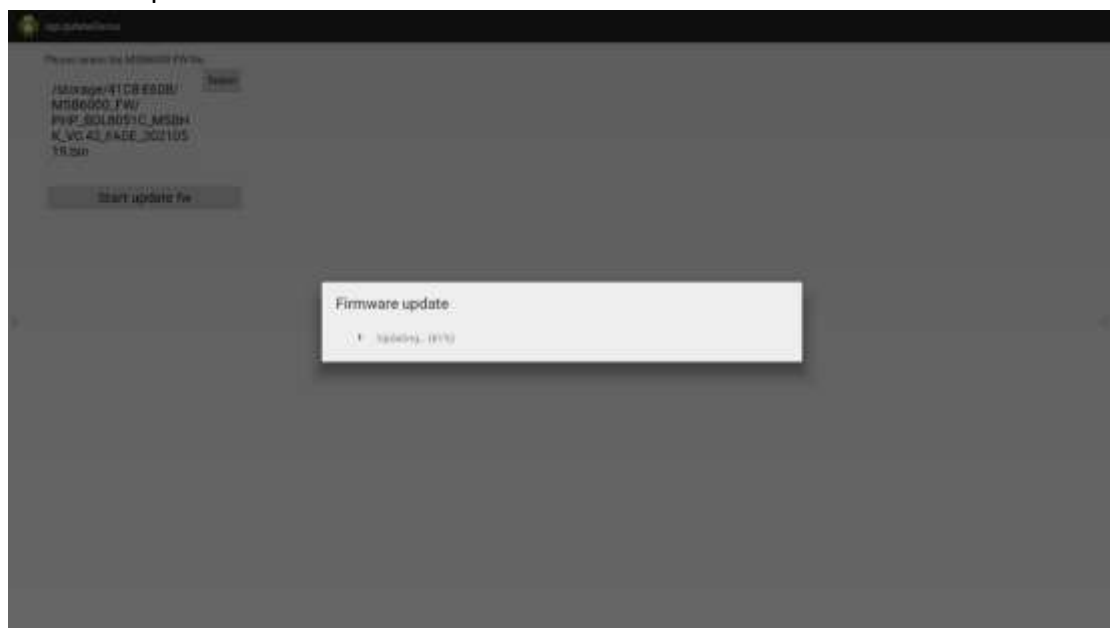

Step6: After the system reboot, please press “HOME + 1999 + BACK” key of the remote controller to show the menu, and then check the FW version.

FactoryMenu	
SHIPPING INIT	>>>
ADC ADJUST	---
PICTURE SETTING	---
SOUND SETTING	---
GENERAL SETTING	---
DEBUG	---
EMC SETTING	---
SYSTEM INFO	---
SYSTEM UPGRADE	---
FACTORY RESET	>>>
<hr/>	
Model Name	65BDL6051C
Panel Name	LC650EQQ-SMA3-GZ-A_Grade
Build Version	20210525105859
Serialno	ABc0123456789
Software Version	FB0B.04T_JP_210525
Touch Type	0
MSB6000 Version	0.38
Ethernet MAC Address	00:E0:4C:68:00:05
WIFI MAC Address	44:d8:78:f6:f8:81
NT68411 Version	0.3
Monitor Version	0.00